


PRODUCT FOCUS **MINICANDLE**

Compact Fluorescent Lamp

**FOR >> CHANDELIERS**  
**>> WALL SCONCES**  
**>> AMBIENT DECORATIVE**  
**FIXTURES**

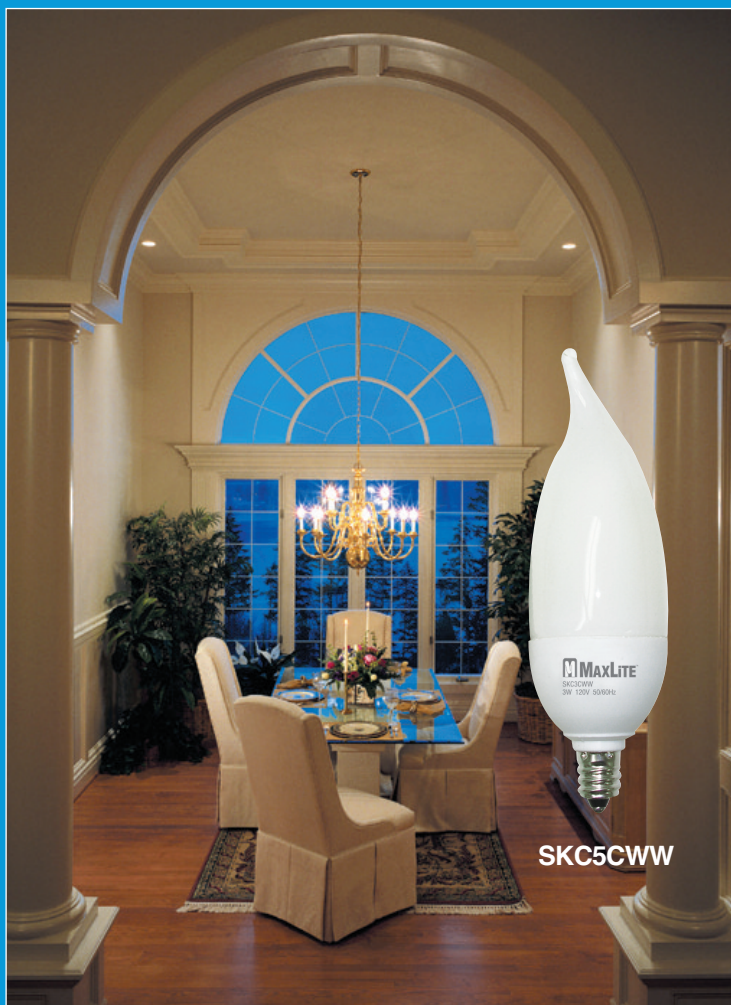

SKC5CWW



C7CWW



SKC7CFWW

- Decorative shape and ultra-small size fit most standard and smaller fixtures
- Saves up to 75% in ENERGY COSTS
- Long Life – Lasts 10,000 hours
- Instant-on, flicker-free electronics

MAX11210-06-24

PRODUCT FOCUS **MINICANDLE**

Compact Fluorescent Lamp



**SKC5CWW**  
10,000 Hour  
(7) 6762720540 (8)\*



**SKC7CWW**  
10,000 Hour  
(7) 6762720740 (2)\*



**SKC7CFWW**  
10,000 Hour  
(7) 6762711917 (0)\*

**MINICANDLE SPECIFICATIONS**

Watts	Order Code	Description	Incandescent Equivalent	Lumens	Lamp Life (Hrs)	Pack Type	Case Pack	Dimensions (W" x MOL")	K
5	20540	SKC5CWW Candle Flame Tip E12 Base	25	220	10,000	Box	24	1.44 x 4.76	2700
5	71535	SKC7CWW-144 Candle E12 Base	30	350	10,000	Box	24	1.42 x 4.10	2700
7	70608	SKC7CFWW Candle Flame Tip E12 Base	30	340	10,000	Box	24	1.44 x 4.76	2700
7	72251	SKC7EWWF Minicandle Flame Tip E26 Base	30	280	10,000	Box	24	1.45 x 4.80	2700

All specifications are subject to change without notice

SPECIAL NOTES	APPLICATIONS	LOCATIONS
>> Not for use on circuits with dimmers, timers, or other control devices.	<ul style="list-style-type: none"> <li>Chandeliers</li> <li>Wall Sconces</li> <li>Ambient Decorative Lighting</li> </ul>	<ul style="list-style-type: none"> <li>Residential</li> <li>Restaurant</li> <li>Retail</li> <li>Hotel/Motel</li> <li>Property Management</li> </ul>

BENEFITS	SPECIFICATIONS
<ul style="list-style-type: none"> <li>Decorative shape and ultra-small size fit most standard and smaller fixtures</li> <li>Saves up to 75% in energy costs</li> <li>Long Life – Lasts 10,000 hours</li> <li>Instant-on, flicker-free electronics</li> <li>Soft natural light with excellent color rendering</li> </ul>	<ul style="list-style-type: none"> <li>Ballast Type &gt;&gt; Electronic</li> <li>Starting Method &gt;&gt; Instant Start</li> <li>Input Line Voltage &gt;&gt; 120VAC</li> <li>Input Line Frequency &gt;&gt; 50/60HZ</li> <li>Mini. Starting Temp. &gt;&gt; 0°F</li> <li>Max. Operating Temp. &gt;&gt; 100°F</li> <li>Color Rendering Index &gt;&gt; 84</li> </ul>

MAX11210 02/15/17



\* UPC Codes



This device complies with Part 18 of the FCC rules. If interference occurs move this product away from the device or plug into a different outlet. This product may cause interference to radio equipment and should not be installed near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.45-30MHz.