

**PATHMAX™ LED BOLLARDS**  
CLASSIC SERIES 42" FLAT TOP



Shown with cone reflector



Shown with louvers



Shown with glare shield



**PRODUCT DESCRIPTION:**

The round Classic LED Bollard is an economical and energy efficient choice for lighting walkways, plazas and other pedestrian areas in commercial and residential applications.

**FEATURES:**

- 120-277V with dimming capability
- Dimming driver standard
- CRI ≥80
- 10 year limited warranty
- Up to 50,000 hour L70 lifetime, TM-21 standards @ 25°C

**CONSTRUCTION:**

- Extruded Aluminum housing
- Clear Polycarbonate lens
- An optional GFCI can be installed and centered 12" from the top of the shaft

**INSTALLATION:**

- Flush Mounting Base with Vandal Resistant Screws
- Installation Kit with 8" Anchor Bolts Included


MODEL SELECTION						Typical order example: BL-CLRF17U-40B					
BL	-	CL	RF	17	U	-		B			
FAMILY	-	SUB FAMILY	SHAPE	WATTAGE	VOLTAGE	-	LED MODULE	FINISH	DISTRIBUTION	HEIGHT	OPTIONS
BL= Bollards	-	CL= Classic Series	RF= Round Flat	17= 17W	U= 120-277V	-	30= 3000K, 80 CRI 40= 4000K, 80 CRI 50= 5000K, 80 CRI	B=Bronze <i>Contact MaxLite for additional finishes</i>	(Blank)= Wide Beam  T3= Type 3, Cone Reflector  LR= Louver	(Blank)= 42"  <i>Contact MaxLite for custom lengths</i>	(Blank)= None  GF= GFCI Outlet, 15A, 120V  GS= 180° glare shield

**SPECIFICATIONS:**

ITEM	SPECIFICATION	DETAILS		
		BL-CLRF17U-XXX	BL-CLRF17U-XXXT3	BL-CLRF17U-XXXBLR
<b>GENERAL PERFORMANCE</b>	Input Power (W)	17W		
	Lumens Delivered (lm)	1,225 - 1,519	918 - 1,081	689 - 778
	Efficacy (lm/W)	up to 89	up to 64	up to 46
	CRI	80		
	BUG	B1-U3-G1	B0-U2-G1 / B0-U3-G1 ( 5000K only)	B1-U2-G1
<b>ELECTRICAL</b>	Power Factor	> 90%		
	Input Voltage	120-277V		
<b>PHYSICAL</b>	Housing	Aluminum		
	Mounting	Flush mounting base; anchor bolts for mounting included		
<b>CERTIFICATION</b>	Certification	cCSAus, IP65, BAA compliant		
	Environment	Outdoor, wet location		
	Warranty	10 years		
	Operating Temperature	-40°F - 104°F (-40°C - 40°C)		

Lighting layouts and spacing criteria available upon request.

**DIMENSIONAL DRAWING:**

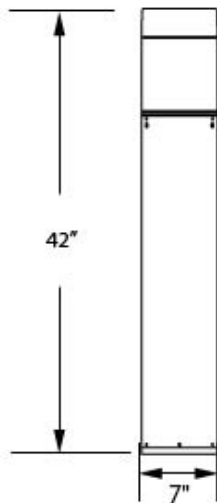

**MOUNTING BASE:**

