


ROUND PENDANT
MLRP G2 SERIES



INDIRECT/DIRECT

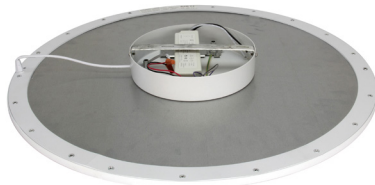

DIRECT



PRODUCT DESCRIPTION:

The LED Round Pendant is a high performance fixture with an appearance that will enhance any office, home, school, hospital or hospitality space. The edge lit design of the LED Round Pendant produces an even, consistent shadowless light. The pendants are fully dimmable using the 0-10V protocol and are compatible with building controls, motion sensors, timers, and other systems using the same protocol. The quality constructed LED panel will provide beautiful light for years!

FEATURES:

- Integral driver
- Universal Voltage: 120-277V
- 0-10V dimming standard
- 10 year warranty
- CRI >80
- Can be suspension mounted (Indirect/Direct models) or surface mounted (Direct models)
- Suitable for damp locations
- Light distribution 70%/30% for Indirect/Direct models
- 6 foot suspension cables included with Indirect/Direct models
- Surface mounting hardware included with Direct models

WARRANTY:

10-year standard warranty with labor allowance* (further details available at www.maxlite.com/warranties)
*Warranty Limitations: Product must be rated for the application per the Product Data Sheet (PDS); operated ≤ 16 hrs; in ambient of -29F to 104F.
*Up to \$25/unit; labor allowances of up to \$500/unit available for purchase – contact MaxLite representative for details.



MODEL SELECTION			Typical order example: MLRP24E40351		
FAMILY	SIZE	EDGE LIT	WATTAGE	CCT	TYPE OF LIGHT
MLRP= Round Pendant	24= 24"	E= Edge Lit	40= 40W	35= 3500K 40= 4000K	D= Direct I= Indirect/ Direct

SPECIFICATIONS:

SPECIFICATIONS:		MLRP24E40XXI	MLRP24E40XXD
ITEM	SPECIFICATION	DETAILS	
GENERAL PERFORMANCE	Power Consumption (W)	36W	36W
	Lumens Delivered (lm)	3,200	3,200
	Efficacy (lm/W)	89	89
	CRI	≥80	
	Color Temperature (K)	3000, 3500, 4000	
	L70 Lifetime (hours)	50,000	
	Color Consistency	Proprietary binning for uniform color	
ELECTRICAL	Power Factor	≥0.9	
	Input Voltage	120-277V	
	Compatible Dimmers	0-10V Dimming	
PHYSICAL	Weight	4.5 lbs	
	Mounting	Suspension	Surface
	Operating Temperature	-4°F to 104°F	
	Humidity	10-80% RH, non-condensing	
QUALIFICATION	Qualification	FCC, cETLus	
	Material Usage	RoHS compliant; no mercury	
	Environment	Damp	
	Warranty	10 year warranty*	

ORDERING TABLE:

ORDER CODE	MODEL NUMBER	WATTAGE	CCT	TYPE OF LIGHT	MOUNTING
1410239	MLRP24E4035D	40W	3500K	DIRECT	SURFACE
1410241	MLRP24E4040D	40W	4000K		
1410240	MLRP24E4035I	40W	3500K	INDIRECT/DIRECT	SUSPENSION
14099709	MLRP24E4040I	40W	4000K		

DIMENSIONS:

